


Environment Sensor (PCB Type)

## 2JCIE-BL01-P1

User's Manual

Environment Sensor (PCB Type)

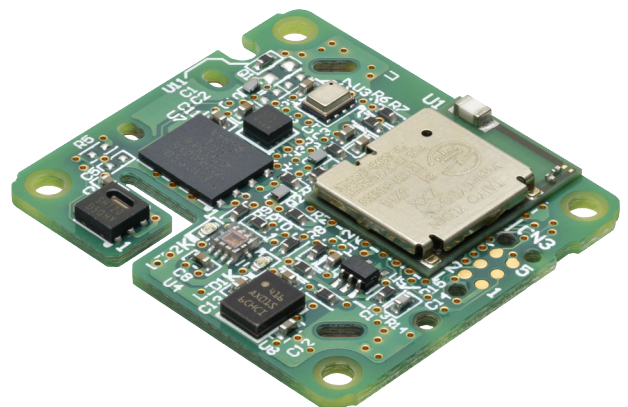

---

## Table of Contents

<b>1. Introduction</b> .....	<b>3</b>
1.1. Scope .....	3
1.2. Communication Interface .....	3
1.3. Operation flow.....	4
1.3.1 With Data Recording mode.....	5
1.3.2 Without Data Recording mode.....	5
1.3.3 Flash memory for data recording .....	6
<b>2. GATT Services</b> .....	<b>7</b>
2.1. Sensor Service (Service UUID: 0x3000).....	8
2.1.1 Latest data (Characteristics UUID: 0x3001) .....	9
2.1.2 Latest page (Characteristics UUID: 0x3002).....	10
2.1.3 Request page (Characteristics UUID: 0x3003).....	11
2.1.4 Response flag (Characteristics UUID: 0x3004) .....	11
2.1.5 Response data (Characteristics UUID: 0x3005) .....	12
2.1.6 Event flag (Characteristics UUID: 0x3006) .....	14
2.2. Setting Service (Service UUID: 0x3010) .....	15
2.2.1 Measurement interval (Characteristics UUID: 0x3011) .....	15
2.2.2 Temperature (Characteristics UUID: 0x3013).....	16
2.2.3 Relative humidity (Characteristics UUID: 0x3014).....	17
2.2.4 Ambient light (Characteristics UUID: 0x3015).....	18
2.2.5 UV Index (Characteristics UUID: 0x3016) .....	19
2.2.6 Pressure (Characteristics UUID: 0x3017) .....	20
2.2.7 Sound Noise (Characteristics UUID: 0x3018) .....	21
2.2.8 Discomfort index (Characteristics UUID: 0x3019) .....	22
2.2.9 Heat stroke (Characteristics UUID: 0x301A).....	23
2.3. Control Service (Service UUID: 0x3030) .....	24
2.3.1 Time information (Characteristics UUID: 0x3031) .....	24
2.3.2 LED on duration (Characteristics UUID: 0x3032) .....	24
2.3.3 Error status (Characteristics UUID: 0x3033) .....	25
2.3.4 Trigger (Characteristics UUID: 0x3034) .....	25
2.4. Parameter Service (Service UUID: 0x3040) .....	26
2.4.1 UUIDs (Characteristics UUID: 0x3041).....	26
2.4.2 ADV setting (Characteristics UUID: 0x3042) .....	27
2.5. DFU Service (Service UUID: 0x3050) .....	29
2.6. Generic Access Service (Service UUID: 0x1800).....	30
2.6.1 Device Name (Characteristics UUID: 0x2A00) .....	30
2.6.2 Appearance (Characteristics UUID: 0x2A01) .....	31
2.6.3 Peripheral Preferred Connection Parameters (Characteristics UUID: 0x2A04).....	31
2.7. Device Information Service (Service UUID: 0x180A).....	32
2.7.1 Model Number String (Characteristics UUID: 0x2A24).....	32
2.7.2 Serial Number String (Characteristics UUID: 0x2A25) .....	33
2.7.3 Firmware Revision String (Characteristics UUID: 0x2A26).....	33
2.7.4 Hardware Revision String (Characteristics UUID: 0x2A27) .....	33
2.7.5 Manufacturer Name String (Characteristics UUID: 0x2A29).....	34
<b>3. Advertise format</b> .....	<b>35</b>

---

3.1. (A) Beacon .....	36
3.2. (B) Connection Advertise 1 .....	37
3.2.1 Advertise (ADV_IND) .....	37
3.2.2 Scan Response (SCAN_RSP).....	38
3.3. (C) Connection Advertise 2 (ADV_IND).....	39
3.4. (D) Sensor ADV 1 (ADV_IND).....	40
3.5. (E) Sensor ADV 2 (ADV_IND) .....	41

---

## 1. Introduction

### 1.1. Scope

This Communication I/F Manual applies to Environment Sensor (PCB Type) 2JCIE-BL01-P1 (hereinafter, referred to as Environment sensor).

### 1.2. Communication Interface

Environment sensor communicates with a smartphone, tablet, etc. via Bluetooth® low energy.

**Table 1. GAP Role**

GAP Role	
Environment Sensor	Peripheral
Smartphone, Tablet or others	Central

### 1.3. Operation flow

According to set Beacon Mode, there are two operation patterns with and without measured data recording. The sensor data measurement and recording to flash memory are carried out regardless of whether they are connected or disconnected to/from the Central device. Further details of Beacon Mode are described in 3. Advertise format.

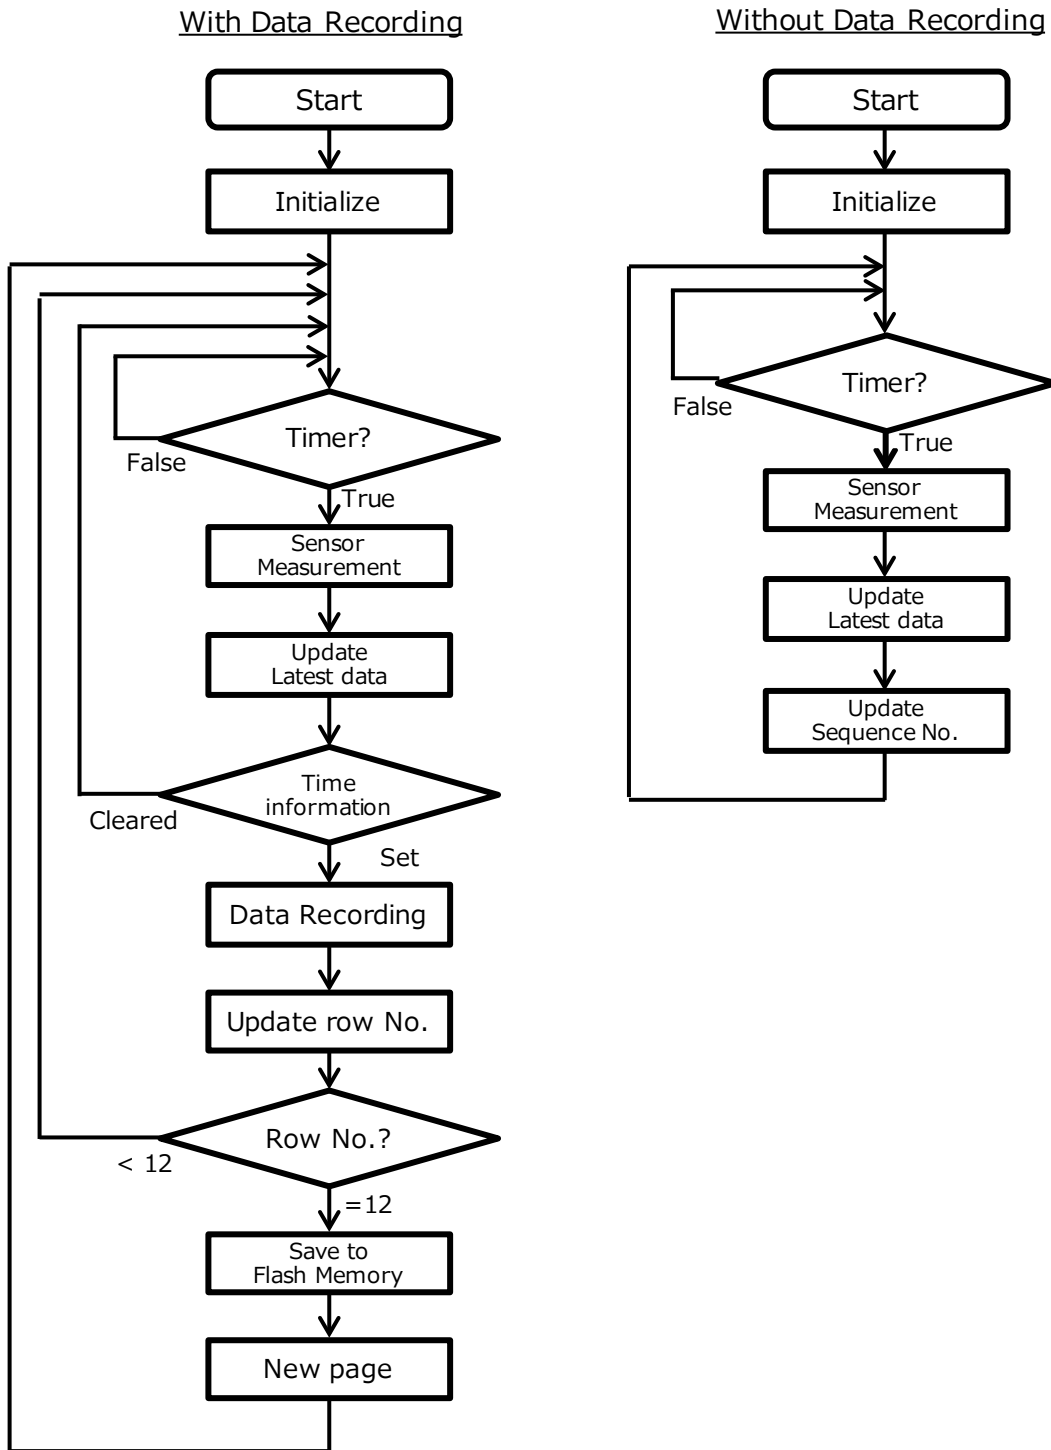


Figure 1 Operation flow

---

### 1.3.1 With Data Recording mode

The following Beacon Modes operate with data recording to the flash memory. To activate data recording, 2.3.1 Time Information must be set from the Central device first. Time information is cleared to zero (0) again when the Measurement Interval is changed, Beacon Mode is changed or power is reset. In these cases, it is necessary to set Time Information again to restart data recording.

**Table 2. List of Beacon Mode with Data Recording**

Beacon Mode	Name	Shortened Device Name	Device Name
0x00	Event Beacon (SCAN RSP)	Env	EnvSensor-BL01
0x01	Standard Beacon	Env	EnvSensor-BL01
0x07	Alternate Beacon	Env	EnvSensor-BL01
0x08	Event Beacon (ADV)	Env	EnvSensor-BL01

### 1.3.2 Without Data Recording mode

Since the measured data is not recorded to the flash memory in the following Beacon Modes, only Latest Data is updated.

**Table 3. List of Beacon Mode without Data Recording**

Beacon Mode	Name	Shortened Device Name	Device Name
0x02	General Broadcaster 1	IM	IM-BL01
0x03	Limited Broadcaster 1	IM	IM-BL01
0x04	General Broadcaster 2	EP	EP-BL01
0x05	Limited Broadcaster 2	EP	EP-BL01

### 1.3.3 Flash memory for data recording

The flash memory consists of 2048 pages in total (from Page 0 to Page 2047), and the content of single page consists of UNIX TIME and 13 rows of measured data. The UNIX TIME indicates the measurement time at the first row of the page (Row 0), and from the first line onwards, it is possible to calculate the measurement time by adding the measurement interval to the UNIX TIME. When data is stored 13 times (from Row 0 to Row 12) in single page, a new page is created for the next measurement.

**Table 4. Example of Memory contents: Page 1**

Items	Contents	Remarks
UNIX TIME	0x5685C180 (1451606400)	2016/1/1 0:00:00
Measurement Interval	0x12C (300sec)	5 min. interval
Row 0	Sensor data	2016/1/1 0:00:00
Row 1	Sensor data	2016/1/1 0:05:00
Row 2	Sensor data	2016/1/1 0:10:00
...	...	...
Row 12	Sensor data	2016/1/1 1:00:00

**Table 5. Example of Memory contents: Page 2**

Items	Contents	Remarks
UNIX TIME	0x5685D0BC (1451610300)	2016/1/1 1:05:00
Measurement Interval	0x12C (300sec)	5 min. interval
Row 0	Sensor data	2016/1/1 1:05:00
Row 1	Sensor data	2016/1/1 1:10:00
...	...	...

---

## 2. GATT Services

UUIDs of supported GATT services are shown below. Except public services defined by Bluetooth specification, full UUIDs of all the CUSTOM services and characteristics are based on the same Base UUID as follows.

Base UUID: 0C4CXXXX-7700-46F4-AA96D5E974E32A54

**Table 6. List of supported GATT Services**

Service UUID	Service name	Number of Characteristics
0x3000	Sensor Service	6
0x3010	Setting Service	9
0x3030	Control Service	4
0x3040	Parameter Service	2
0x3050	DFU Service	3
0x1800 (Public)	Generic Access Service	3
0x1801 (Public)	Generic Attribute Service	1
0x180A (Public)	Device Information Service	5



---

## 2.1. Sensor Service (Service UUID: 0x3000)

Sensor Service is the service for the sensor data acquisition.

**Table 7. List of Characteristics in Sensor Service**

Characteristics UUID	Characteristics	Properties				Byte
		R	W	N	I	
0x3001	Latest data	✓		✓		19
0x3002	Latest page	✓				9
0x3003	Request page	✓	✓			3
0x3004	Response flag	✓				5
0x3005	Response data	✓				19
0x3006	Event flag	✓		✓		9

\*Properties (R : Read, W : Write, N : Notify, I : Indicate)

### 2.1.1 Latest data (Characteristics UUID: 0x3001)

Measured sensor data is updated every measurement interval and reflected in Latest data. The measurement interval can be changed in 2.2.1 Measurement interval.

In addition to regular update in set measurement interval, when sensor is disconnected from Central devices, the measurement is immediately carried out then the contents of this characteristics is updated. However, in case of immediate data measurement, this measured data is not saved to the memory and row number is not updated.

**Table 8. Latest data format**

Byte	Field		Format	Contents
0	Row number / Sequence number		UInt8	With Data Recording: Range : 0~12 *1 Without Data Recording: Range : 0~255
1	Temperature	L	SInt16	Unit : 0.01 degC
2		H		
3	Relative Humidity	L	SInt16	Unit : 0.01 %RH
4		H		
5	Light	L	SInt16	Unit : 1 lx
6		H		
7	UV Index	L	SInt16	Unit : 0.01
8		H		
9	Barometric Pressure	L	SInt16	Unit : 0.1 hPa
10		H		
11	Sound noise	L	SInt16	Unit : 0.01 dB
12		H		
13	Discomfort Index *2	L	SInt16	Unit : 0.01
14		H		
15	Heatstroke risk factor *2	L	SInt16	Unit : 0.01 degC
16		H		
17	Supply voltage	L	UInt16	Unit : 1 mV
18		H		

\*1 In the operation with data recording mode, the value is always zero unless Time information is set.

\*2 Discomfort Index, Heatstroke risk factor (WBGT approximation) are calculated only by temperature and humidity. These information is just a rough indication and for referential use only.

### 2.1.2 Latest page (Characteristics UUID: 0x3002)

The Latest page shows the latest page and row information of the memory as the progress status of data recording.

The Central device can acquire the past memory data by referring to the difference between the page information at the previous data retrieving and this latest page information.

**Table 9. Latest page format**

Byte	Field		Format	Contents
0	UNIX TIME	0	UInt32	Created time of the latest page. Unit : 1 sec Range : 1970/1/1 0:00:01~2106/2/7 6:28:15
1		1		
2		2		
3		3		
4	Measurement interval	L	UInt16	Unit : 1 sec Range : 1~3600 sec
5		H		
6	Latest page	L	UInt16	Range : 0~2047
7		H		
8	Latest row		UInt8	Range : 0~12

### 2.1.3 Request page (Characteristics UUID: 0x3003)

Specify the page number to retrieve the measured data from the flash memory.

The result of retrieving from the memory for the page specified in this Characteristic will be set in 2.1.4 Response flag and the past measured data will be set in 2.1.5 Response data.

\* Note: Memory recording of measured data is not started unless 2.3.1 Time information is set.

**Table 10. Request page format**

Byte	Field	Format	Contents
0	Requesting Page No.	UInt16	Range : 0~2047
1			
2	Requesting Row No.	UInt8	Range : 0~12

### 2.1.4 Response flag (Characteristics UUID: 0x3004)

When requesting page and row number is set in 2.1.3 Request page, 2.1.5 Response Data will be updated with retrieved measured data. Whether the update is successfully completed or not can be known by the Update flag of this Characteristic.

In addition, updating of this Characteristic is done in the page basis, confirmation in the row basis is unnecessary.

\* Note: Memory recording of measured data is not started unless 2.3.1 Time information is set.

**Table 11. Response flag format**

Byte	Field	Format	Contents	
0	Update flag	UInt8	0x00: Retrieving 0x01: Completed 0x02: Failed to retrieve data	
1	UNIX TIME	UInt32	Created time of this page. Unit : 1 sec Range : 1970/1/1 0:00:01~2106/2/7 6:28:15	
2				0
3				1
4				2 3

### 2.1.5 Response data (Characteristics UUID: 0x3005)

Retrieved memory data in the page and row specified in 2.1.3 Request page will be updated in this characteristic. Correct data acquisition can be made after the update flag becomes "Completed" in 2.1.5 Response flag. Also, by reading this Characteristic, the data of the next row in the same page is automatically set to this Characteristic (descending order Row 12 to Row 0).


Therefore, it is unnecessary to specify 2.1.3 Request page for each row, and all row in the same page can be read by continuous Read of this Characteristic. However, since automatic retrieving across pages is not performed, when moving to the next page, it is necessary to specify the page number again to 2.1.3 Request page and confirm the 2.1.4 Response flag each time.

\* Note: Memory recording of measured data is not started unless 2.3.1 Time information is set.

**Table 12. Response data format**

Byte	Field	Format	Contents
0	Row number	UInt8	Range : 0~12
1	Temperature	L	SInt16 Unit : 0.01 degC
2		H	
3	Relative Humidity	L	SInt16 Unit : 0.01 %RH
4		H	
5	Light	L	SInt16 Unit : 1 lx
6		H	
7	UV Index	L	SInt16 Unit : 0.01
8		H	
9	Barometric Pressure	L	SInt16 Unit : 0.1 hPa
10		H	
11	Sound noise	L	SInt16 Unit : 0.01 dB
12		H	
13	Discomfort Index	L	SInt16 Unit : 0.01
14		H	
15	Heatstroke risk factor	L	SInt16 Unit : 0.01 degC
16		H	
17	Supply voltage	L	UInt16 Unit : 1 mV
18		H	

Operation flow of data retrieving from flash memory is shown below.

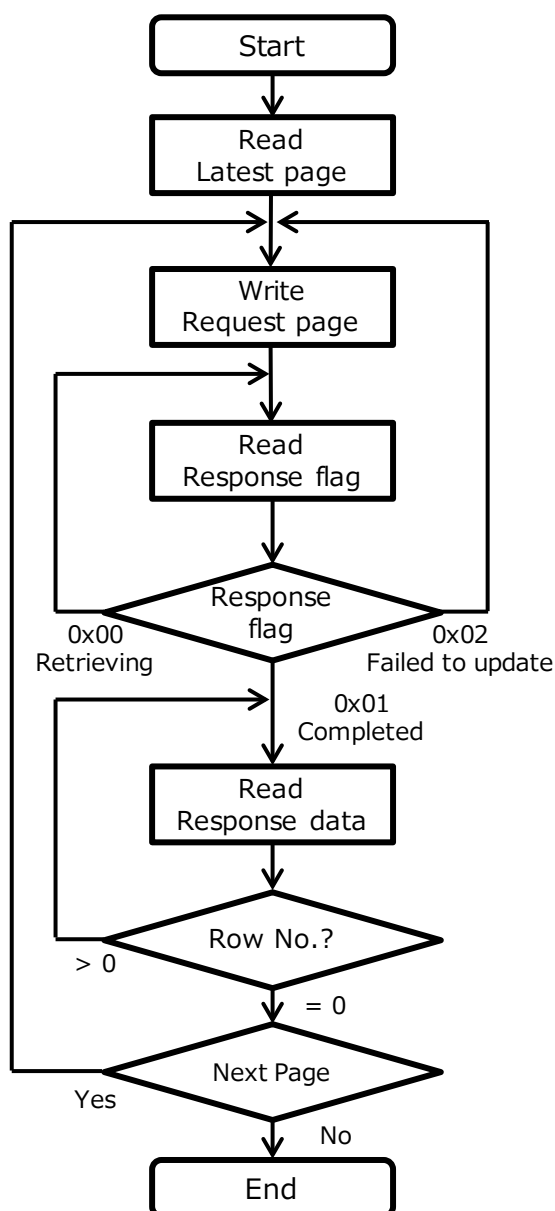

**Figure 2 Operation flow of data retrieving from flash memory**

- \*1 The information of the latest page can be acquire from 2.1.2 Latest page or the page information in advertisement data.
- \*2. While the result of reading Response flag is 0x00: Retrieving, try reading Response flag until updating is completed.
- \*3. If the result of reading Response flag is 0x02: Fail and updating is not completed after 3 times of retry, the data in the flash memory may be corrupted. In this case, skip the corresponding page and obtain the data of the next page.

### 2.1.6 Event flag (Characteristics UUID: 0x3006)

The state of occurrence of various events is represented by a bit field for each sensor.

**Table 13. Event flag format**

Byte	Field	Format	Contents
0	Temperature	UInt8	Bit 7-6 : RFU Bit 5 : Simple threshold [lower limit] Bit 4 : Simple threshold [upper limit] Bit 3 : Changing trend [decline/term] Bit 2 : Changing trend [rise/term] Bit 1 : Changing trend [decline/previous] Bit 0 : Changing trend [rise/previous]
1	Relative Humidity	UInt8	
2	Light	UInt8	
3	UV Index	UInt8	
4	Barometric Pressure	UInt8	
5	Sound noise	UInt8	
6	Discomfort Index	UInt8	
7	Heatstroke risk factor	UInt8	
8	Other events	UInt8	Bit 7-1 : RFU Bit 0 : Low supply voltage


\* Simple threshold : The state where the latest acquisition data exceeds the set threshold.

\* Changing trend

[term] : The state in which there is at least one difference equal to or greater than set threshold between the latest data and the predetermined number of past data.

[previous] : The stat in which the difference between the latest data and the previous data is equal to or greater than the set threshold.

Simple Thres

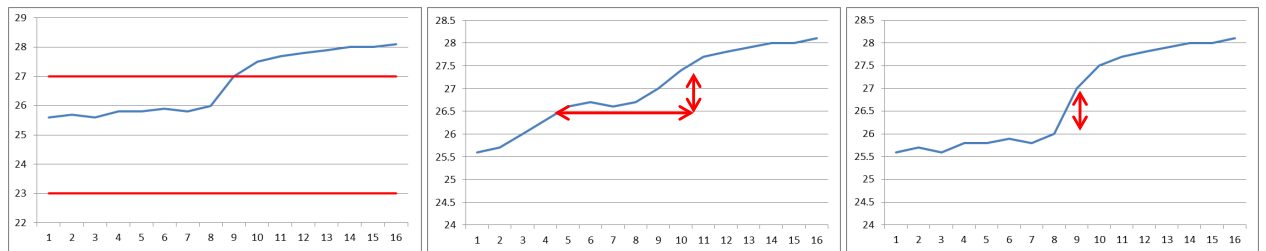

**Figure 3 Event detection**

## 2.2. Setting Service (Service UUID: 0x3010)

Read and Write the settings of each sensor.

**Table 14. List of Characteristics in Sensor Setting Service**

Characteristics UUID	Characteristics	Properties				Byte
		R	W	N	I	
0x3011	Measurement interval	✓	✓			2
0x3013	Temperature	✓	✓			15
0x3014	Relative humidity	✓	✓			15
0x3015	Ambient light	✓	✓			15
0x3016	UV Index	✓	✓			15
0x3017	Pressure	✓	✓			15
0x3018	Sound noise	✓	✓			15
0x3019	Discomfort index	✓	✓			15
0x301A	Heat stroke	✓	✓			15

### 2.2.1 Measurement interval (Characteristics UUID: 0x3011)

Specify measurement interval in seconds. (Common to all sensors)

Time information is cleared to zero (0) when changing the measurement interval, so it is necessary to set the time again to start data recording.

**Table 15. Measurement interval format**

Byte	Field	Format	Contents
0	Measurement interval	UInt16	Unit : 1 sec
1			Range : 1~3600 sec Default : 300 sec (0x012C)

The possible recording period are shown in Table 16.

**Table 16. Relationship between Measurement interval and possible recording period**

Measurement interval	Recording period (hour)	Recording period (day)
1 sec	7.4 hour	0.3 days
10 sec	74 hour	3.0 days
30 sec	222 hour	9.2 days
60 sec	444 hour	18 days
300 sec	2219 hour	92 days
600 sec	4437 hour	185 days
3600 sec	26624 hour	1109 days



## 2.2.2 Temperature (Characteristics UUID: 0x3013)

Temperature sensor related event settings.

**Table 17. Temperature format**

Byte	Field	Format	Contents	
0	Event Enable/Disable	UInt8	Bit 7-6 : RFU Bit 5 : Simple threshold [lower limit] Bit 4 : Simple threshold [upper limit] Bit 3 : Changing trend [decline/term] Bit 2 : Changing trend [rise/term] Bit 1 : Changing trend [decline/previous] Bit 0 : Changing trend [rise/previous] Enable: 1, Disable: 0 Default : 0x00	
1	Changing trend threshold [rise/previous]	L	SInt16 Unit : 0.01 degC Range : 0.01~30.00 degC Default : 0x00C8 (2.00 degC)	
2		H		
3	Changing trend threshold [decline/previous]	L		
4		H		
5	Changing trend threshold [rise/term]	L		
6		H		
7	Changing trend threshold [decline/term]	L		
8		H		
9	Simple threshold [upper limit]	L	SInt16 Unit : 0.01 degC Range : -10.00~60.00 degC Default : 0x0DAC (35.00 degC)	
10		H		
11	Simple threshold [lower limit]	L		Unit : 0.01 degC Range : -10.00~60.00 degC Default : 0x03E8 (10.00 degC)
12		H		
13	Term for changing trend (Number of Measurements)	UInt8	Unit : 1 count Range : 1~8 count Default : 0x06 (6 count)	
14	Moving average number	UInt8	Unit : 1 count Range : 1~8 count Default : 0x01 (1 count)	

### 2.2.3 Relative humidity (Characteristics UUID: 0x3014)

Humidity sensor related event settings.

**Table 18. Relative Humidity format**

Byte	Field	Format	Contents	
0	Event Enable/Disable	UInt8	Bit 7-6 : RFU Bit 5 : Simple threshold [lower limit] Bit 4 : Simple threshold [upper limit] Bit 3 : Changing trend [decline/term] Bit 2 : Changing trend [rise/term] Bit 1 : Changing trend [decline/previous] Bit 0 : Changing trend [rise/previous] Enable: 1, Disable: 0 Default : 0x00	
1	Changing trend threshold [rise/previous]	L	SInt16 Unit : 0.01 %RH Range : 0.01~50.00 %RH Default : 0x01F4 (5.00 %RH)	
2		H		
3	Changing trend threshold [decline/previous]	L		
4		H		
5	Changing trend threshold [rise/term]	L		
6		H		
7	Changing trend threshold [decline/term]	L		
8		H		
9	Simple threshold [upper limit]	L	SInt16 Unit : 0.01 %RH Range : 0.00~100.00 %RH Default : 0x1F40 (80.00 %RH)	
10		H		
11	Simple threshold [lower limit]	L		SInt16 Unit : 0.01 %RH Range : 0.00~100.00 %RH Default : 0x0DAC (35.00 %RH)
12		H		
13	Term for changing trend (Number of Measurements)	UInt8	Unit : 1 count Range : 1~8 count Default : 0x06 (6 count)	
14	Moving average number	UInt8	Unit : 1 count Range : 1~8 count Default : 0x01 (1 count)	

## 2.2.4 Ambient light (Characteristics UUID: 0x3015)

Light sensor related event settings.

**Table 19. Ambient Light format**

Byte	Field	Format	Contents
0	Event Enable/Disable	UInt8	Bit 7-6 : RFU Bit 5 : Simple threshold [lower limit] Bit 4 : Simple threshold [upper limit] Bit 3 : Changing trend [decline/term] Bit 2 : Changing trend [rise/term] Bit 1 : Changing trend [decline/previous] Bit 0 : Changing trend [rise/previous] Enable: 1, Disable: 0 Default : 0x00
1	Changing trend threshold [rise/previous]	L	SInt16 Unit : 1 lx Range : 1~2000 lx Default : 0x00C8 (200 lx)
2		H	
3	Changing trend threshold [decline/previous]	L	
4		H	
5	Changing trend threshold [rise/term]	L	
6		H	
7	Changing trend threshold [decline/term]	L	
8		H	
9	Simple threshold [upper limit]	L	SInt16 Unit : 1 lx Range : 10~10000 lx Default : 0x07D0 (2000 lx)
10		H	
11	Simple threshold [lower limit]	L	
12		H	
13	Term for changing trend (Number of Measurements)	UInt8	Unit : 1 count Range : 1~8 count Default : 0x06 (6 count)
14	Moving average number	UInt8	Unit : 1 count Range : 1~8 count Default : 0x01 (1 count)

## 2.2.5 UV Index (Characteristics UUID: 0x3016)

UV sensor related event settings.

**Table 20. UV Index format**

Byte	Field	Format	Contents
0	Event Enable/Disable	UInt8	Bit 7-6 : RFU Bit 5 : Simple threshold [lower limit] Bit 4 : Simple threshold [upper limit] Bit 3 : Changing trend [decline/term] Bit 2 : Changing trend [rise/term] Bit 1 : Changing trend [decline/previous] Bit 0 : Changing trend [rise/previous] Enable: 1, Disable: 0 Default : 0x00
1	Changing trend threshold [rise/previous]	L	SInt16 Unit : 0.01 Range : Index 0.00~11.00 Default : 0x012C (3.00)
2		H	
3	Changing trend threshold [decline/previous]	L	
4		H	
5	Changing trend threshold [rise/term]	L	
6		H	
7	Changing trend threshold [decline/term]	L	
8		H	
9	Simple threshold [upper limit]	L	SInt16 Unit : 0.01 Range : Index 0.00~11.00 Default : 0x0258 (6.00)
10		H	
11	Simple threshold [lower limit]	L	
12		H	
13	Term for changing trend (Number of Measurements)	UInt8	Unit : 1 count Range : 1~8 count Default : 0x06 (6 count)
14	Moving average number	UInt8	Unit : 1 count Range : 1~8 count Default : 0x01 (1 count)

## 2.2.6 Pressure (Characteristics UUID: 0x3017)

Barometric Pressure sensor related event settings.

**Table 21. Pressure format**

Byte	Field	Format	Contents
0	Event Enable/Disable	UInt8	Bit 7-6 : RFU Bit 5 : Simple threshold [lower limit] Bit 4 : Simple threshold [upper limit] Bit 3 : Changing trend [decline/term] Bit 2 : Changing trend [rise/term] Bit 1 : Changing trend [decline/previous] Bit 0 : Changing trend [rise/previous] Enable: 1, Disable: 0 Default : 0x00
1	Changing trend threshold [rise/previous]	L	SInt16  Unit : 0.1 hPa Range : 0.1~200.0 hPa Default : 0x0032 (5.0 hPa)
2		H	
3	Changing trend threshold [decline/previous]	L	
4		H	
5	Changing trend threshold [rise/term]	L	
6		H	
7	Changing trend threshold [decline/term]	L	
8		H	
9	Simple threshold [upper limit]	L	SInt16 Unit : 0.1 hPa Range : 700.0~1100.0 hPa Default : 0x2AF8 (1100.0 hPa)
10		H	
11	Simple threshold [lower limit]	L	SInt16 Unit : 0.1 hPa Range : 700.0~1100.0 hPa Default : 0x1B58 (700.0 hPa)
12		H	
13	Term for changing trend (Number of Measurements)	UInt8	Unit : 1 count Range : 1~8 count Default : 0x06 (6 count)
14	Moving average number	UInt8	Unit : 1 count Range : 1~8 count Default : 0x01 (1 count)

## 2.2.7 Sound Noise (Characteristics UUID: 0x3018)

Microphone related event settings.

**Table 22. Sound Noise format**

Byte	Field	Format	Contents
0	Event Enable/Disable	UInt8	Bit 7-6 : RFU Bit 5 : Simple threshold [lower limit] Bit 4 : Simple threshold [upper limit] Bit 3 : Changing trend [decline/term] Bit 2 : Changing trend [rise/term] Bit 1 : Changing trend [decline/previous] Bit 0 : Changing trend [rise/previous] Enable: 1, Disable: 0 Default : 0x00
1	Changing trend threshold [rise/previous]	L	Unit : 0.01 dB Range : 0.01~50.00 dB Default : 0x07D0 (20.00 dB)
2		H	
3	Changing trend threshold [decline/previous]	L	
4		H	
5	Changing trend threshold [rise/term]	L	
6		H	
7	Changing trend threshold [decline/term]	L	
8		H	
9	Simple threshold [upper limit]	L	Unit : 0.01 dB Range : 40.00~85.00 dB Default : 0x1B58 dB (70.00)
10		H	
11	Simple threshold [lower limit]	L	Unit : 0.01 dB Range : 40.00~85.00 dB Default : 0x0FA0 (40.00 dB)
12		H	
13	Term for changing trend (Number of Measurements)	UInt8	Unit : 1 count Range : 1~8 count Default : 0x06 (6 count)
14	Moving average number	UInt8	Unit : 1 count Range : 1~8 count Default : 0x01 (1 count)

## 2.2.8 Discomfort index (Characteristics UUID: 0x3019)

Discomfort Index related event settings.

**Table 23. Discomfort index format**

Byte	Field	Format	Contents
0	Event Enable/Disable	UInt8	Bit 7-6 : RFU Bit 5 : Simple threshold [lower limit] Bit 4 : Simple threshold [upper limit] Bit 3 : Changing trend [decline/term] Bit 2 : Changing trend [rise/term] Bit 1 : Changing trend [decline/previous] Bit 0 : Changing trend [rise/previous] Enable: 1, Disable: 0 Default : 0x00
1	Changing trend threshold [rise/previous]	L	SInt16  Unit : 0.01 Range : 0.01~50.00 Default : 0x03E8 (10.00)
2		H	
3	Changing trend threshold [decline/previous]	L	
4		H	
5	Changing trend threshold [rise/term]	L	
6		H	
7	Changing trend threshold [decline/term]	L	
8		H	
9	Simple threshold [upper limit]	L	SInt16 Unit : 0.01 Range : 55.00~85.00 Default : 0x1F40 (80.00)
10		H	
11	Simple threshold [lower limit]	L	SInt16 Unit : 0.01 Range : 55.00~85.00 Default : 0x157C (55.00)
12		H	
13	Term for changing trend (Number of Measurements)	UInt8	Unit : 1 count Range : 1~8 count Default : 0x06 (6 count)
14	Moving average number	UInt8	Unit : 1 count Range : 1~8 count Default : 0x01 (1 count)

## 2.2.9 Heat stroke (Characteristics UUID: 0x301A)

Heatstroke risk factor related event settings.

**Table 24. Heat stroke format**

Byte	Field	Format	Contents
0	Event Enable/Disable	UInt8	Bit 7-6 : RFU Bit 5 : Simple threshold [lower limit] Bit 4 : Simple threshold [upper limit] Bit 3 : Changing trend [decline/term] Bit 2 : Changing trend [rise/term] Bit 1 : Changing trend [decline/previous] Bit 0 : Changing trend [rise/previous] Enable: 1, Disable: 0 Default : 0x00
1	Changing trend threshold [rise/previous]	L	Unit : 0.01 degC Range : 0.01~30.00 degC Default : 0x012C (3.00 degC)
2		H	
3	Changing trend threshold [decline/previous]	L	
4		H	
5	Changing trend threshold [rise/term]	L	
6		H	
7	Changing trend threshold [decline/term]	L	
8		H	
9	Simple threshold [upper limit]	L	Unit : 0.01 degC Range : 25~40 degC Default : 0x0AF0 (28.00 degC)
10		H	
11	Simple threshold [lower limit]	L	Unit : 0.01 degC Range : 25~40 degC Default : 0x09C4 (25.00 degC)
12		H	
13	Term for changing trend (Number of Measurements)	UInt8	Unit : 1 count Range : 1~8 count Default : 0x06 (6 count)
14	Moving average number	UInt8	Unit : 1 count Range : 1~8 count Default : 0x01 (1 count)



## 2.3. Control Service (Service UUID: 0x3030)

Read and Write device control parameters.

**Table 25. List of Characteristics in Control Service**

Characteristics UUID	Characteristics	Properties				Byte
		R	W	N	I	
0x3031	Time information	✓	✓			4
0x3032	LED on duration		✓			1
0x3033	Error status	✓	✓			4
0x3034	Trigger		✓			2

### 2.3.1 Time information (Characteristics UUID: 0x3031)

Set UNIX TIME from the Central device for time adjustment of the recording data in the flash memory.

Time information based on this setting is recorded for each page of the flash memory.

\* Note: Memory recording of measured data is not started unless time set to this Characteristic.

**Table 26. Time information format**

Byte	Field	Format	Contents	
0	UNIX TIME	UInt32	Unit : 1 sec Range : 1970/1/1 0:00:01~2106/2/7 6:28:15	
1				0
2				1
3				2

### 2.3.2 LED on duration (Characteristics UUID: 0x3032)

With this setting, embedded LED lights for the specified time period.

It can be used for identifying the sensor which is currently connected, such as when there are a plurality of sensors.

**Table 27. LED on duration format**

Byte	Field	Format	Contents
0	LED on duration	UInt8	Unit : 1 sec Range : 1~10 sec

### 2.3.3 Error status (Characteristics UUID: 0x3033)

Various error conditions of the sensor are indicated by a bit field. The error state can be reset by writing 0 from the Central device.

\*Just reading this characteristic does not reset the state.

**Table 28. Error status format**

Byte	Field	Format	Contents
0	Sensor Status	UInt8	Bit 7 : RFU Bit 6 : Error: Accelerometer* Bit 5 : Error: Microphone Bit 4 : Error: Barometric Pressure sensor Bit 3 : Error: UV sensor Bit 2 : Error: Light sensor Bit 1 : Error: Humidity sensor Bit 0 : Error: Temperature sensor *valid only with built-in Accelerometer type
1	CPU Status	UInt8	Bit 7-2 : RFU Bit 1 : Boot default setting Bit 0 : Flash memory verify error
2	Power Status	UInt8	Bit 7-2 : RFU Bit 1 : Error in reading supply voltage Bit 0 : Low voltage
3	RFU	UInt8	Bit 7-0 : RFU

### 2.3.4 Trigger (Characteristics UUID: 0x3034)

After setting 0x01 for DFU Service, subsequent Service Discovery operation can discover hidden DFU Service.

**Table 29. Trigger format**

Byte	Field	Format	Contents
0	RFU	UInt8	0x00 : None (Always set to 0x00)
1	DFU Service Enable / Disable	UInt8	0x00 : Disable 0x01 : Enable

## 2.4. Parameter Service (Service UUID: 0x3040)

Read and Write the settings on Bluetooth communication parameters.

**Table 30. List of Characteristics in BLE Parameter Service**

Characteristics UUID	Characteristics	Contents	Properties				Byte
			R	W	N	I	
0x3041	UUIDs	UUID, Major, Minor	✓	✓			20
0x3042	ADV setting	Advertise setting	✓	✓			10

### 2.4.1 UUIDs (Characteristics UUID: 0x3041)

Specify UUID to be sent in Beacon Mode = Beacon(Advertise Format (A)).

**Table 31. UUIDs format**

Byte	Field		Format	Contents
0	UUID		UInt128	Default : 0C4C3000-7700-46F4-AA96D5E974E32A54
1				
2				
3				
4				
5				
6				
7				
8				
9				
10				
11				
12				
13				
14				
15				
16	Major	L	UInt16	Default : 0x0000 *Not used
17		H		
18	Minor	L	UInt16	Default : 0x0000 *Not used
19		H		

## 2.4.2 ADV setting (Characteristics UUID: 0x3042)

Set various Advertisement related parameters.

Time Information is cleared to zero (0) when Beacon Mode is changed, so Time Information must be set to start data recording again.

\*After changing the settings of this characteristic, it is necessary to make power cycle.

\* It makes difficult to establish a connection with the central device in a very short "Transmission period in Limited Broadcaster" setting.

**Table 32. ADV setting format**

Byte	Field		Format	Contents
0	ADV_IND	L	UInt16	Advertise interval Unit : 0.625ms Range : 0x0320(500ms)~0x4000(10.24s) Default : 0x0808 (1285ms)
1	Advertise interval	H		
2	ADV_NONCON_IND	L	UInt16	Unit : 0.625ms Range : 0x00A0(100ms)~0x4000(10.24s) Default : 0x00A0 (100ms) *Not used
3	Advertise interval	H		
4	Transmission period in Limited Broadcaster	L	UInt16	Set transmission period per cycle when Beacon Mode 0x03,0x05 Limited Broadcaster Unit : 1 sec Range : 0x0001(1s)~0x3FFF(16383s) Default : 0x000A (10s)
5		H		
6	Silent period in Limited Broadcaster	L	UInt16	Set silent period per cycle when Beacon Mode 0x03,0x05 Limited Broadcaster Unit : 1 sec Range : 0x0001(1s)~0x3FFF(16383s) Default : 0x0032 (50s)
7		H		
8	Beacon Mode		UInt8	Range : 0x00(0)~0x0A(10) Default : 0x08 (8) *Refer to Table 33. Beacon Mode for details
9	Tx Power		SInt8	Unit : dBm Range : -20, -16, -12, -8, -4, 0, 4 dBm Default : 0x00 (0 dBm)

**Table 33. Beacon Mode**

Beacon Mode	Name	Shortened Device Name	Device Name	Adv. Format	
				Normal condition	Event detected
0x00	Event Beacon (SCAN RSP)	Env	EnvSensor-BL01	(B)	(A)/(B) Alternate
0x01	Standard Beacon	Env	EnvSensor-BL01	(B)	
0x02	General Broadcaster 1	IM	IM-BL01	(D)	
0x03	Limited Broadcaster 1	IM	IM-BL01	(D)	
0x04	General Broadcaster 2	EP	EP-BL01	(E)	
0x05	Limited Broadcaster 2	EP	EP-BL01	(E)	
0x07	Alternate Beacon	Env	EnvSensor-BL01	(A)/(B) Alternate	
0x08	Event Beacon (ADV)	Env	EnvSensor-BL01	(C)	(A)/(C) Alternate

\* (A~E): refer to 3.Advertise Format for more details

---

## 2.5. DFU Service (Service UUID: 0x3050)

Perform Firmware update via BLE communication.

**Table 34. List of Characteristic in DFU Service**

Attribute UUID	Characteristics	Properties				Byte
		R	W	N	I	
0x3051	DFU Control Point		✓	✓		-
0x3052	DFU Packet		✓*			-
0x3053	DFU Revision	✓				2

\*"W" in DFU Packet means Write Without Response

## 2.6. Generic Access Service (Service UUID: 0x1800)

**Table 35. List of Characteristics in Generic Access Service**

Attribute UUID	Characteristics	Contents	Properties				Byte
			R	W	N	I	
0x2A00	Device Name	Name	✓				14
0x2A01	Appearance	Category	✓				2
0x2A04	Peripheral Preferred Connection Parameters	Minimum connection interval	✓				2
		Maximum connection interval	✓				2
		Slave latency	✓				2
		Connection supervision timeout multiplier	✓				2

### 2.6.1 Device Name (Characteristics UUID: 0x2A00)

**Table 36. Device Name format**

Byte	Field	Format	Contents
0	Device Name	Utf8s	"E" 0x45
1			"n" 0x6E
2			"v" 0x76
3			"S" 0x53
4			"e" 0x65
5			"n" 0x6E
6			"s" 0x73
7			"o" 0x6F
8			"r" 0x72
9			"-" 0x2D
10			"B" 0x42
11			"L" 0x4C
12			"0" 0x30
13			"1" 0x31

\* When in Beacon Mode 0x02, 0x03: IM-BL01 (7 Byte)

\* When in Beacon Mode 0x04, 0x05: EP-BL01 (7 Byte)

## 2.6.2 Appearance (Characteristics UUID: 0x2A01)

**Table 37. Appearance format**

Byte	Field		Format	Contents
0	Category	L	16bit	0 : Unknown
1		H		

## 2.6.3 Peripheral Preferred Connection Parameters (Characteristics UUID: 0x2A04)

Connection parameter update is performed 5 seconds after Connection, and thereafter 3 times with 30 seconds interval.

**Table 38. Peripheral Preferred Connection Parameters format**

Byte	Field	Format	Contents
0	Minimum connection interval	16bit	Unit : 1.25ms
1			Value : 0x0014(25ms)
2	Maximum connection interval	16bit	Unit : 1.25ms
3			Value : 0x0028(50ms)
4	Slave Latency	16bit	Value : 0x0004 (4)
5			
6	Connection Supervision	16bit	Unit : 10ms
7	Timeout Multiplier		Value : 0x0190 (4s)



## 2.7. Device Information Service (Service UUID: 0x180A)

**Table 39. List of Characteristics in Device Information Service**

Attribute UUID	Characteristics	Contents	Properties				Byte
			R	W	N	I	
0x2A24	Model Number String	Model Number	✓				10
0x2A25	Serial Number String	Serial Number	✓				10
0x2A26	Firmware Revision String	Firmware Revision	✓				5
0x2A27	Hardware Revision String	Hardware Revision	✓				5
0x2A29	Manufacturer Name String	Manufacturer Name	✓				5

### 2.7.1 Model Number String (Characteristics UUID: 0x2A24)

**Table 40. Model Number String format**

Byte	Field	Format	Contents
0	Model Number	Utf8s	"2" 0x32
1			"J" 0x4A
2			"C" 0x43
3			"I" 0x49
4			"E" 0x45
5			"-" 0x2D
6			"B" 0x42
7			"L" 0x4C
8			"O" 0x30
9			"1" 0x31

### 2.7.2 Serial Number String (Characteristics UUID: 0x2A25)

**Table 41. Serial Number String format**

Byte	Field	Format	Contents
0	Serial Number	Utf8s	"0"~"3" 0x30~0x33
1			"0"~"9" 0x30~0x39
2			"0"~"9", "X", "Y", "Z" 0x30~0x39, 0x58, 0x59, 0x5A
3			"0"~"9" 0x30~0x39
4			"M" 0x4D
5			"Y" 0x59
6			"0"~"9" 0x30~0x39
7			"0"~"9" 0x30~0x39
8			"0"~"9" 0x30~0x39
9			"0"~"9" 0x30~0x39

### 2.7.3 Firmware Revision String (Characteristics UUID: 0x2A26)

**Table 42. Firmware Revision String format**

Byte	Field	Format	Contents
0	Firmware Revision	Utf8s	"0"~"9" 0x30~0x39
1			"0"~"9" 0x30~0x39
2			"." 0x2E
3			"0"~"9" 0x30~0x39
4			"0"~"9" 0x30~0x39

### 2.7.4 Hardware Revision String (Characteristics UUID: 0x2A27)

**Table 43. Hardware Revision String format**

Byte	Field	Format	Contents
0	Hardware Revision	Utf8s	"0"~"9" 0x30~0x39
1			"0"~"9" 0x30~0x39
2			"." 0x2E
3			"0"~"9" 0x30~0x39
4			"0"~"9" 0x30~0x39

---

### 2.7.5 Manufacturer Name String (Characteristics UUID: 0x2A29)

**Table 44. Manufacturer Name String format**

Byte	Field	Format	Contents
0	Manufacturer Name	Utf8s	"O" 0x4F
1			"M" 0x4D
2			"R" 0x52
3			"O" 0x4F
4			"N" 0x4E

---

### 3. Advertise format

The following Advertise format can be selected by Beacon Mode in ADV Setting.

- (A) Beacon

iBeacon equivalent format.

Major = Latest Page number, Minor = Row number.

- (B) Connection Advertise 1

This format contains Flag and Local Name.

The latest sensor data, Latest page information, and event flag are included in SCAN\_RSP Payload after receiving ADV\_IND.

- (C) Connection Advertise 2

This format contains Flag, Local Name, Latest page information, and event flag. There is no SCAN\_RSP and sensor data is not included.

- (D) Sensor ADV 1

This format contains the latest sensor data including Flag, Local Name, and acceleration information (with built-in Accelerometer type only).

- (E) Sensor ADV 2

This format contains Flag, Local Name, and latest sensor data.

\* Battery Voltage (= Supply voltage) in Advertise Format shall be expressed as follows.

$((\text{Acquired value} + 100) \times 10) \text{ mV}$

\* Event flag (sensor name + Evt) in Advertise Format conforms to the bit field of 2.1.6 Event flag.

### 3.1. (A) Beacon

**Table 45. (A) Beacon format**

0		Preamble (1 octets)	
1			
2		Access Address (4 octets)	
3			
4			
5		0 PDU Header (16bits)	
6		1	
7		2	
8		3	
9		4	
10		5	
11		6	
12		7	
13		8	
14		9	
15		10	
16		11	
17		12	
18		13	
19		14	
20		15	
21		16	
22		17	
23		18	
24		19	
25		20	
26		21	
27		22	
28		23	
29		24	
30		25	
31		26	
32		27	
33		28	
34		29	
35		30	
36		31	
37		32	
38		33	
39		34	
40		35	
41		36	
42		37	
43			
44		CRC	
45			

Link Layer packet format (46 octets)	PDU (38 octets)	ADV_NONCONN_IND PDU Payload (36 octets)	ScanRspData (30 octets)	AD 1	0	Length	0x02
					1	AD Type	0x01
					2	Flags	0x06
					3	Length	0x1A
					4	AD Type	0xFF
					5	Company ID	0x4C
					6	Beacon type	0x00
					7	Beacon type	0x02
					8	Beacon type	0x15
					9	UUID	0x0C
					10		0x4C
					11		0x30
					12		0x00
					13		0x77
					14		0x00
				15	0x46		
				16	0xF4		
				17	0xAA		
				18	0x96		
				19	0xD5		
				20	0xE9		
				21	0x74		
				22	0xE3		
				23	0x2A		
				24	0x54		
				25	Major		
				26	Minor		
				27	Power	0xC3	
				28			
				29			
30							
31							
32							
33							
34							
35							
36							

### 3.2. (B) Connection Advertise 1

#### 3.2.1 Advertise (ADV\_IND)

**Table 46. (B) Connection Advertise 1 - Advertise (ADV\_IND) format**

0		Preamble (1 octets)	
1			
2		Access Address (4 octets)	
3			
4			
5		0	
6		1	
7		2	
8		3	
9		4	
10		5	
11		6	
12		7	
13		8	
14		9	
15		10	
16		11	
17		12	
18		13	
19		14	
20		15	
21		16	
22		17	
23		18	
24		19	
25		CRC (3 octets)	
26			
27			

Link Layer packet format (28 octets)	PDU (20 octets)	ADV_IND PDU Payload (18 octets)	PDU Header (16bits)				
			AdvA (6 octets)				
			AdvData (12 octets)	AD 1	0	Length	0x02
					1	AD Type	0x01
					2	Flags	0x06
			AD 2	3	Length	0x03	
	4	AD Type		0x02			
	5	16-bit Service UUIDs		0x0A			
	6		0x18				
	AD 3	7	Length	0x04			
		8	AD Type	0x08			
		9	Local Name	"E"			
10	"n"						
11	"v"						

### 3.2.2 Scan Response (SCAN\_RSP)

**Table 47. (B) Connection Advertise 1 - Scan Response (SCAN\_RSP) format**

0		Preamble (1 octets)			
1					
2		Access Address (4 octets)			
3					
4					
5		0		PDU Header (16bits)	
6		1			
7		2		0	
8		3		1	
9		4		2	
10		5		3	
11		6		4	
12		7		5	
13		8		6	
14		9		7	
15		10		8	
16		11		9	
17		12		10	
18		13		11	
19		14		12	
20		15		13	
21		16		14	
22		17		15	
23		18		16	
24		19		17	
25		20		18	
26		21		19	
27		22		20	
28		23		21	
29		24		22	
30		25		23	
31		26		24	
32		27		25	
33		28		26	
34		29		27	
35		30		28	
36		31		29	
37		32		30	
38		33		31	
39		34		32	
40		35		33	
41		36		34	
42		37		35	
43		38		36	
44				0	
45		CRC (3 octets)		Length	
46				AD Type	
				Company ID	
				Page information	
				Row information	
				Unique Identifier	
				Temperature Evt	
				Relative humidity Evt	
				Ambient light Evt	
				UV index Evt	
				Pressure Evt	
				Sound noise Evt	
				Discomfort index Evt	
				Heat stroke Evt	
				Misc Evt	
				Temperature	
				Relative humidity	
				Ambient light	
				Pressure	
				Sound	
				Battery voltage	

### 3.3. (C) Connection Advertise 2 (ADV\_IND)

**Table 48. (C) Connection Advertise 2 (ADV\_IND) format**

0		Preamble (1 octets)				
1						
2						
3	Access Address (4 octets)					
4						
5	0	PDU Header (16bits)				
6	1					
7	2	0	AdvA (6 octets)			
8	3	1				
9	4	2				
10	5	3				
11	6	4				
12	7	5				
13	8	6	AD 1	0	Length	0x02
14	9	7		1	AD Type	0x01
15	10	8		2	Flags	0x06
16	11	9	AD 2	3	Length	0x03
17	12	10		4	AD Type	0x02
18	13	11		5	16-bit Service UUIDs	0x0A
19	14	12	6	0x18		
20	15	13	AD 3	7	Length	0x12
21	16	14		8	AD Type	0xFF
22	17	15		9	Company ID	0xD5
23	18	16		10		0x02
24	19	17		11	Page(+row) information	
25	20	18		12		
26	21	19		13	Unique Identifier	
27	22	20		14		
28	23	21		15		
29	24	22		16		
30	25	23	17	Temperature Evt		
31	26	24	18	Relative humidity Evt		
32	27	25	19	Ambient light Evt		
33	28	26	20	UV index Evt		
34	29	27	21	Pressure Evt		
35	30	28	22	Sound noise Evt		
36	31	29	23	Discomfort index Evt		
37	32	30	24	Heat stroke Evt		
38	33	31	25	Misc Evt		
39	34	32	AD 4	26	Length	0x04
40	35	33		27	AD Type	0x08
41	36	34		28	Local Name	"E"
42	37	35		29		"n"
43	38	36	30	"v"		
44	CRC (3 octets)					
45						
46						

\* Page information = (UInt16\_t)((page << 4) | row)



### 3.4. (D) Sensor ADV 1 (ADV\_IND)

**Table 49. (D) Sensor ADV 1 (ADV\_IND) format**

0		Preamble (1 octets)	
1			
2			
3		Access Address (4 octets)	
4			
5		0	
6		1	
7		2	
8		3	
9		4	
10		5	
11		6	
12		7	
13		8	
14		9	
15		10	
16		11	
17		12	
18		13	
19		14	
20		15	
21		16	
22		17	
23		18	
24		19	
25		20	
26		21	
27		22	
28		23	
29		24	
30		25	
31		26	
32		27	
33		28	
34		29	
35		30	
36		31	
37		32	
38		33	
39		34	
40		35	
41		36	
42		37	
43		38	
44			
45		CRC	
46			

Link Layer packet format (47 octets)	PDU (39 octets)	ADV_IND PDU Payload (37 octets)	AdvData (31 octets)	AD 1	0	Length	0x02
					1	AD Type	0x01
					2	Flags	0x06
				AD 2	3	Length	0x17
					4	AD Type	0xFF
					5	Company ID	0xD5
		6	Company ID		0x02		
		7	Sequence number				
		8	Temperature				
		9	Temperature				
		10	Relative humidity				
		11	Relative humidity				
		12	Ambient light				
		13	Ambient light				
		14	UV index				
		15	UV index				
		16	Pressure				
		17	Pressure				
		18	Sound noise				
		19	Sound noise				
		20	Acceleration X				
		21	Acceleration X				
		22	Acceleration Y				
		23	Acceleration Y				
		24	Acceleration Z				
		25	Acceleration Z				
		26	Battery voltage				
		AD 3	27		Length	0x03	
			28		AD Type	0x08	
			29		Local Name	"I"	
			30	Local Name	"M"		

\*Acceleration values are valid only with built-in Accelerometer type. Otherwise, these will be zero.

### 3.5. (E) Sensor ADV 2 (ADV\_IND)

**Table 50. (E) Sensor ADV 2 (ADV\_IND) format**

0		Preamble (1 octets)			
1					
2					
3		Access Address (4 octets)			
4					
5		0		PDU Header (16bits)	
6		1			
7		2			
8		3			
9		4			
10		5		AdvA (6 octets)	
11		6			
12		7			
13		8			
14		9			
15		10			
16		11			
17		12			
18		13			
19		14			
20		15			
21		16			
22		17			
23		18			
24		19			
25		20			
26		21			
27		22			
28		23			
29		24			
30		25			
31		26			
32		27			
33		28			
34		29			
35		30			
36		31			
37		32			
38		33			
39		34			
40		35			
41		36			
42		37			
43		38			
44					
45		CRC			
46					

Link Layer packet format (47 octets)	PDU (39 octets)	ADV_IND PDU Payload (37 octets)	AdvData (31 octets)	AD 1	0	Length	0x02
					1	AD Type	0x01
					2	Flags	0x06
					3	Length	0x17
					4	AD Type	0xFF
					5	Company ID	0xD5
					6	Company ID	0x02
					7	Sequence number	
					8	Temperature	
					9		
					10	Relative humidity	
					11		
					12	Ambient light	
					13		
					14	UV index	
				15			
				16	Pressure		
				17			
				18	Sound noise		
				19			
				20	Discomfort index		
				21			
				22	Heat stroke		
				23			
				24	RFU		
				25			
				26	Battery voltage		
				27			
				28	Length	0x03	
				29	AD Type	0x08	
				30	Local Name	"E"	
				"P"			

---

## Revision history

#	Revision	Date	Changes
1	1.0	22/05/2018	Released
2	1.1	28/05/2018	Modified : Product name

Please check each region's Terms & Conditions by region website.

---

## **OMRON Corporation**

**Electronic and Mechanical Components Company**

### **Regional Contact**

**Americas**

<https://www.components.omron.com/>

**Asia-Pacific**

<https://ecb.omron.com.sg/>

**Korea**

<https://www.omron-ecb.co.kr/>

**Europe**

<http://components.omron.eu/>

**China**

<https://www.ecb.omron.com.cn/>

**Japan**

<https://www.omron.co.jp/ecb/>