
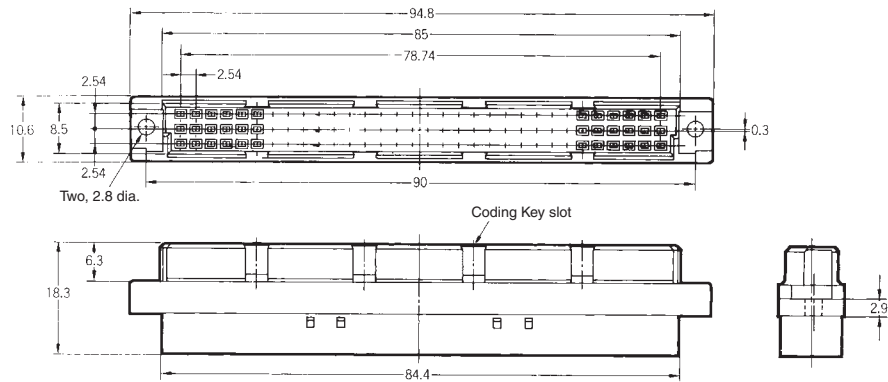


XC6V Discrete-wire Press-fit DIN Connectors



■ Dimensions

(unit: mm)

Connector Housing XC6M-96



Single-row Contacts XC6W-3221 (Size 1 AWG24/26) XC6W-3222 (Size 2 AWG26/28)

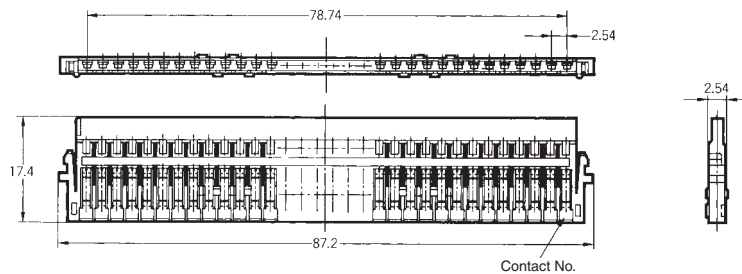


Dummy Board XC6T-32




Note: Dimensions are the same as those for the Single-row Contacts.

Spare Contacts XC6W-0021 (Size 1, AWG24/26) XC6W-0022 (Size 2, AWG26/28)



Note: This can be used as a replacement Connector in the event of erroneous connection.

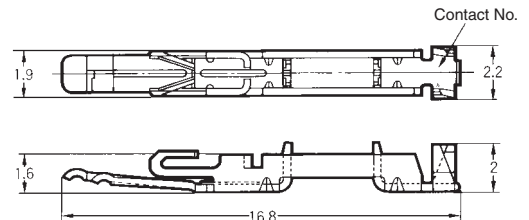

■ Ordering Information

Individual Models

Name	No. of contacts	Applicable wire	Model
Connector Housing	(See note.)	---	XC6M-96
Single-row Contacts	32	AWG24/26	XC6W-3221
	32	AWG26/28	XC6W-3222
Dummy Board	---	---	XC6T-32
Spare Contacts	---	AWG24/26	XC6W-0021
	---	AWG26/28	XC6W-0022

Note: Three Single-row Contacts (32 contacts) can be inserted.

Combinations

No. of contacts	Applicable wire	Model	Model and quantity
96	AWG24/26	XC6V-9621	XC6M-96 × 1 XC6W-3221 × 3
	AWG26/28	XC6V-9622	XC6M-96 × 1 XC6W-3222 × 3
64	AWG24/26	XC6V-6421	XC6M-96 × 1 XC6W-3221 × 2 XC6T-32 × 1
	AWG26/28	XC6V-6422	XC6M-96 × 1 XC6W-3222 × 2 XC6T-32 × 1

Note: 1. Accommodating model numbers are not printed on the Connectors.

2. For combinations other than the above especially when using different wires for each row, order the Connectors individually.