

International DIN standards; Solderless Connection Series (Fine Fit)

- Backplane systems can be designed with ease with XC5 Connectors as conforming with DIN standards.
- Using unique W-shaped pins, these Connectors prevent contacts from being bent or falling out. Ensures highly reliable connections.
- Less damage to the through-holes in circuit boards.
- The XC6-series Connectors can be used as Backplane Connectors.
- Uses highly-reliable Twin-contact Sockets.
- A special Press-fit Tool is available.

RoHS Compliant


■ Ratings and Characteristics

Rated current	2 A
Rated voltage	300 VAC
Contact resistance	20 mΩ max. (at 20 mV, 100 mA max.)
Insulation resistance	10 ⁶ MΩ min. (at 100 VDC)
Dielectric strength	1,000 VAC for 1 min (leakage current: 1 mA max.)
Total insertion force	0.59 N max. per contact
Removal force	0.15 N max. (with test gauge, t = 0.56 mm)
Insertion durability	200 times
Ambient operating temperature	Operating: -55 to 125°C (with no icing)

■ Materials and Finish

Type	Plugs	Sockets
Housings	Fiber-glass reinforced PBT resin (UL94V-0)/gray	
Contacts (See note.)	Mating end	Copper alloy/nickel base, 0.4-μm gold plating
	Fine fit	Copper alloy/nickel base, gold flash plating
	Terminal	Copper alloy/nickel base, 0.15-μm gold plating (See note.)

Note: For non-standard plating specifications, contact your OMRON representative.

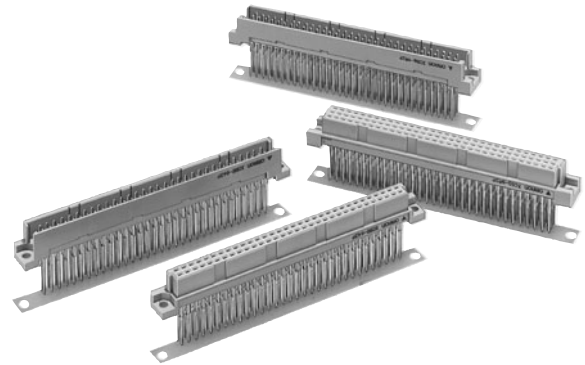

■ Applicable Wrap Post Wire Sizes

AWG30, AWG28, AWG26, or AWG24
(Solid wire: 0.25 to 0.51 mm dia.)

■ Wrap Post Length

3 wires for the 13-mm contacts
4 wires for the 17-mm contacts

■ Ratings for Fine-fit Connectors

Rated current	2 A
Contact resistance	5 mΩ max. (at 20 mV, 100 mA max.)
Pressure input	196 N max. per contact
Holding force	44.1 N min.
Unit torque durability	0.022 N-m min.
Vibration	At 10 to 2,000 Hz, 1.52-mm amplitude, or 15 G will not interrupt current for more than 1 μ sec.
Shock	At 100 G, will not break current for more than 1 μ sec.

■ Applicable Fine-fit Boards


- Width 1.6 to 3.2 mm
- Through-hole diameter 1.0 ±0.08 mm (Drill diameter 1.15 ±0.05 mm)
Plating: Copper 25 μm min., or solder 5 μm min. on a copper base at least 25 μm thick.
- Pitch error: ±0.03 mm max.

XC5E Double-row Plugs, DIN Q-type, Fine-fit, W-shaped Pins

Dimensions

(unit: mm)

XC5E-□□2P-11□□
(With straight terminals)

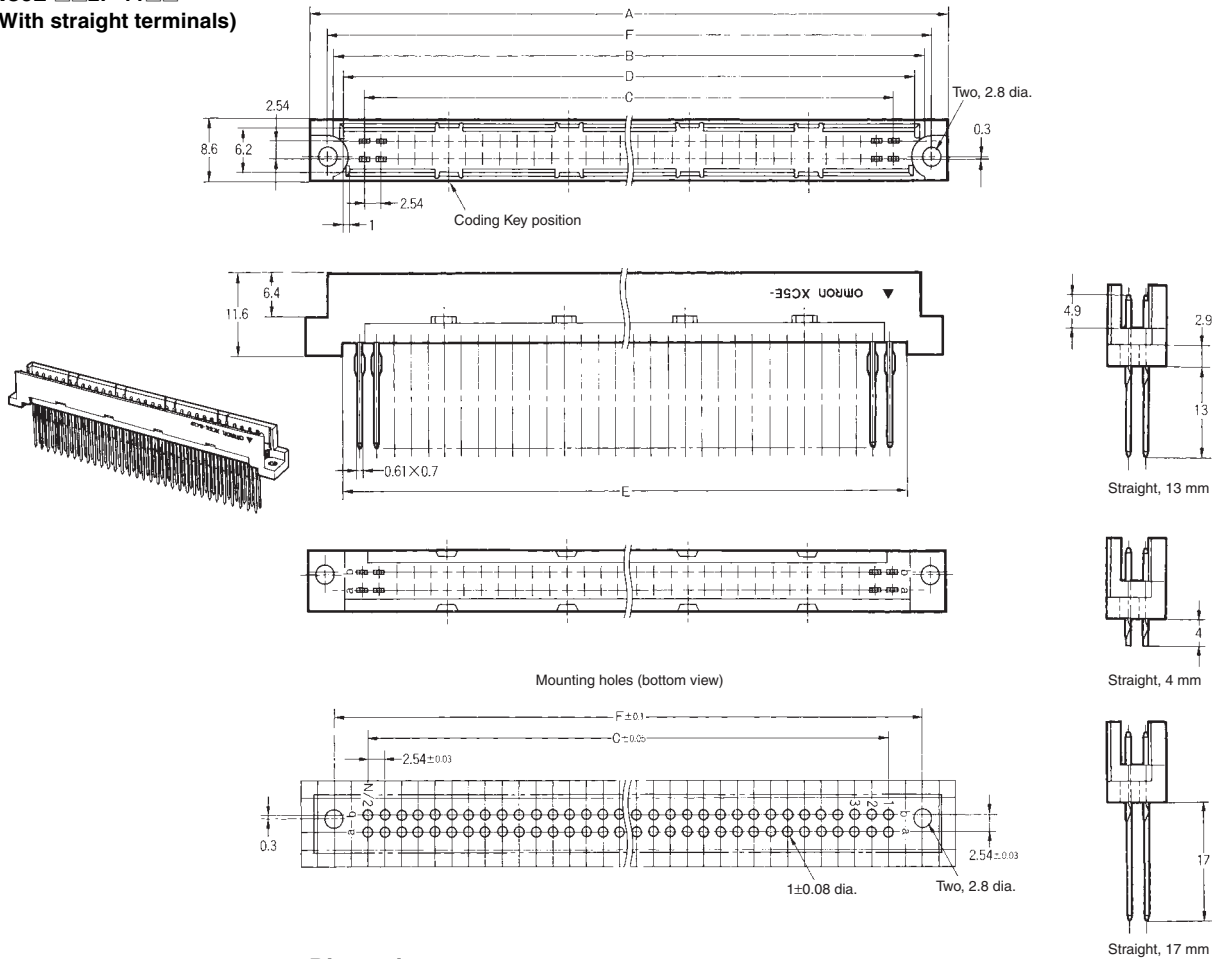

Dimensions

No. of contacts	Dimensions (mm)						Coding Key positions (contact No.)
	A	B	C	D	E	F	
32	54.2	47.4	38.10	44.6	43.3	49.36	5, 12
64	94.8	88.0	78.74	85.2	83.9	90.00	6, 13, 20, 27
100	140.5	133.7	124.46	130.9	129.7	135.72	10, 20, 31, 41

Ordering Information

No. of contacts	Terminal type		
	Straight terminals, 4 mm	Straight terminals, 13 mm	Straight terminals, 17 mm
32	XC5E-322P-1140	XC5E-322P-1131	XC5E-322P-1132
64	XC5E-642P-1140	XC5E-642P-1131	XC5E-642P-1132
100	XC5E-012P-1140	---	---